


FEATURES

- Miniature size, Rounded by metallized polyester film, good self-healing effect
- Moisture-proof, flame retardant, some small capacitance can be used in series film
- Low dissipation factor, high voltage, box type by the epoxy potting
- Good self-healing effect, good stability and reliability
- Identical appearance is applicable to all kinds of low dissipation and high precision capacitance circuits
- Widely used for DC low pulse portion of occasions, typical applications are amplifier, TV, communications, power supply and other products requiring high reliability circuit


DRAWING (mm)

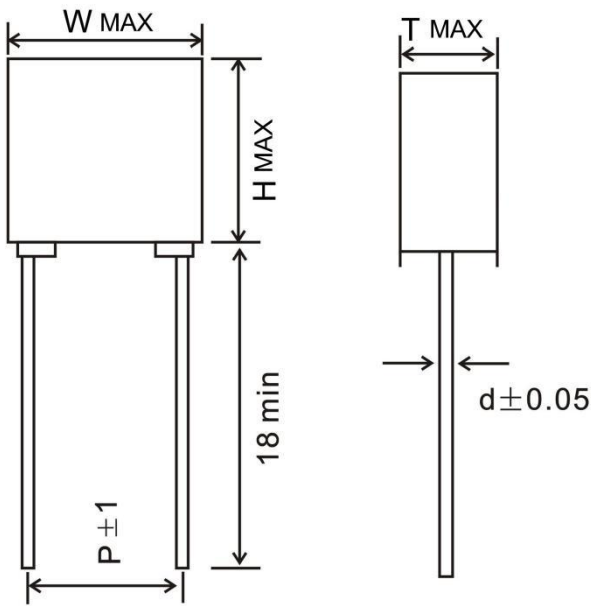

SPECIFICATIONS

Operating Temperature	-40°C ~ +100°C , 40/100/21
Rated Voltage(V.DC)	50V, 63V,100V, 250V, 400V, 630V.
Capacitance Range	0.001 ~ 2.2μF
Capacitance Tolerance	±5%, ±10%, ±20%
Insulation Resistance	$U_R \leq 100V \quad C \leq 0.33\mu F \geq 3750M\Omega$
	$C > 0.33\mu F \geq 1250S$
	$U_R > 100V \quad C \leq 0.33\mu F \geq 7500M\Omega$
	$C > 0.33\mu F \geq 2500S$
	(20°C 100VDC 60SEC) P.S: $T[s]=I.R.[M\Omega]*CN[\mu F]$
Dissipation Factor	≤0.01 (at 1KHz 20°C)

PICTURE

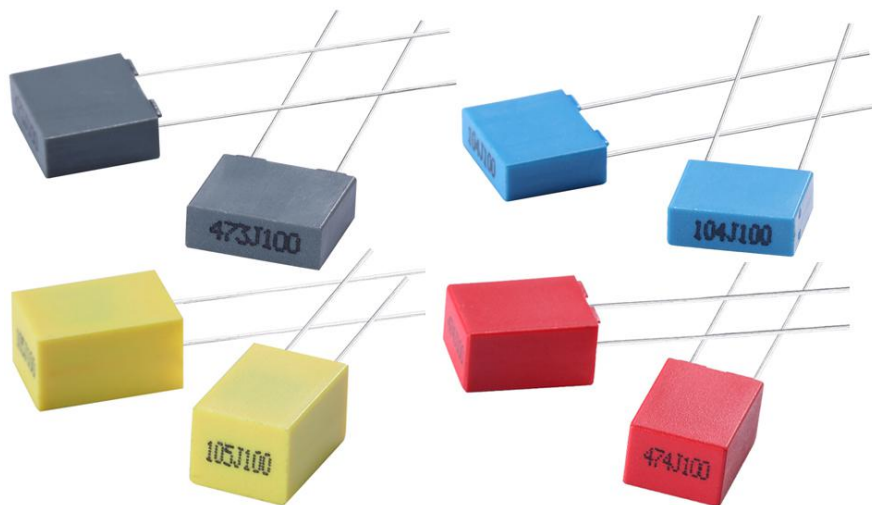

SIZE TABLE (mm)

(μF)	63VDC			100VDC			250VDC			400VDC			630VDC		
	W	H	T	W	H	T	W	H	T	W	H	T	W	H	T
0.0010	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0039	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5
0.0062	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5
0.0068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5
0.0082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	10.0	5.0
0.010	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0
0.027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0
0.033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0
0.039	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	--	--	--
0.047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0	--	--	--
0.082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--
0.10	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--
0.12	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--	--	--	--
0.15	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--	--	--	--
0.18	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--	--	--	--
0.22	7.2	7.5	3.5	7.2	7.5	3.5	7.2	10.0	5.0	--	--	--	--	--	--
0.27	7.2	7.5	3.5	7.2	10.0	5.0	7.2	10.0	5.0	--	--	--	--	--	--
0.33	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
0.47	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
0.56	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
0.68	7.2	10.0	5.0	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
1.0	7.2	11.0	6.0	7.2	11.0	6.0	--	--	--	--	--	--	--	--	--
1.5	7.2	11.0	6.0	--	--	--	--	--	--	--	--	--	--	--	--
2.2	7.2	11.0	6.0	--	--	--	--	--	--	--	--	--	--	--	--

(μF)	63VDC			100VDC			400VDC			(μF)	63VDC			100VDC		
	W	H	T	W	H	T	W	H	T		W	H	T	W	H	T
0.068	--	--	--	--	--	--	7.2	9.5	4.5	0.27	7.2	6.5	2.5	7.2	9.5	4.5
0.082	--	--	--	--	--	--	7.2	9.5	4.5	0.33	7.2	7.5	3.5	7.2	9.5	4.5
0.12	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--	0.47	7.2	7.5	3.5	7.2	9.5	4.5
0.15	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--	0.56	7.2	7.5	3.5	7.2	9.5	4.5
0.18	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--	0.68	7.2	9.5	4.5	7.2	9.5	4.5
0.22	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--	1.0	7.2	10.0	5.0	--	--	--

Note: Other Values are available on request. WEET is capable of doing custom service for you.



WEE Technology Company Limited
ROOM 1405, 14/F, LUCKY CENTRE,
171 WANCHAI ROAD,
WANCHAI, HONG KONG
www.weetcap.com
info@weetcap.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.



Copyright © 2000 WEE Technology, All rights reserved.