


FEATURES

- Rounded by metallized polypropylene film, low dissipation, small internal temperature rise, good self-healing effect
- Flame retardant epoxy powder coating, good insulation resistance.
- Excellent self-healing property and reliability
- This product is used for the various requirements of low loss or high precision circuits. .

DRAWING (mm)

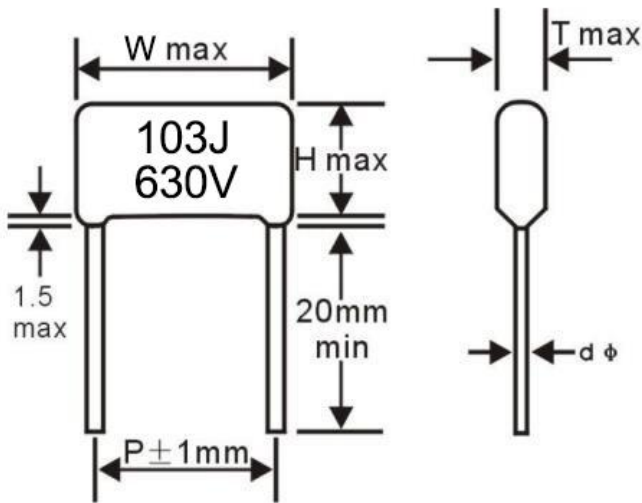

SPECIFICATIONS

Operating Temperature	-40°C ~ +85°C, 40/85/21
Rated Voltage	63V, 100V, 250V, 400V, 630V, 1000V.DC
Capacitance Range	0.001 ~ 0.33μF
Capacitance Tolerance	±5% (J)
Insulation Resistance	≥ 15 000MΩ, CR ≤ 0.33μF ≥ 5 000S, CR > 0.33μF (20°C, 1min)
Dissipation Factor	≤ 1.0% (20°C, 1KHz)

PICTURE



SIZE TABLE (mm)

Cap. (μ F)	63/100VDC					200/250 VDC					400 VDC					630 /1000VDC				
	W	H	T	P	D	W	H	T	P	D	W	H	T	P	D	W	H	T	P	D
	Max	Max	Max			Max	Max	Max			Max	Max	Max			Max	Max	Max		
0.001	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0012	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0015	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0018	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0022	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0027	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0033	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0039	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0047	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0056	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0068	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.0082	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.01	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5
0.012	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5
0.015	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5
0.018	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5
0.022	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5
0.027	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	9	5	5	0.5
0.033	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	9.5	5.5	5	0.5
0.039	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5					
0.047	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5					
0.056	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	8.5	4.5	5	0.5					
0.068	7.2	7.2	4	5	0.5	7.2	7.2	4	5	0.5	7.2	9	5	5	0.5					
0.082	7.2	8.5	4.5	5	0.5	7.2	8.5	4.5	5	0.5	7.2	9	5	5	0.5					
0.1	7.2	8.5	4.5	5	0.5	7.2	8.5	4.5	5	0.5	7.2	10	6	5	0.5					
0.15	7.2	9.5	5.5	5	0.5	7.2	9.5	5.5	5	0.5	7.2	11	7	5	0.5					
0.22	7.2	11	6.5	5	0.5	7.2	11	6.5	5	0.5	7.2	13	8	5	0.5					
0.33	7.2	12.5	7.5	5	0.5	7.2	12.5	7.5	5	0.5										

Note: Other Values are available on request. WEET is capable of doing custom service for you.



WEE Technology Company Limited
ROOM 1405, 14/F, LUCKY CENTRE,
171 WANCHAI ROAD,
WANCHAI, HONG KONG
www.weetcap.com
info@weetcap.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.



Copyright © 2000 WEE Technology, All rights reserved.