


FEATURES

- Metallized polypropylene(MPP) film capacitor, Dry structure, Epoxy filling
- Flame retardant plastic shell, RoHS Compliant
- The protection class is S0, B and C Life Degree on request
- High pressure-resistant, long life, Self-healing
- Application: WEET CBB60 capacitors are widely applied as AC motor start or motor running for water pump, washing machine, paper smashing machine, ceiling fans, ventilation equipment, air conditioning and so on.

DRAWING (mm) :

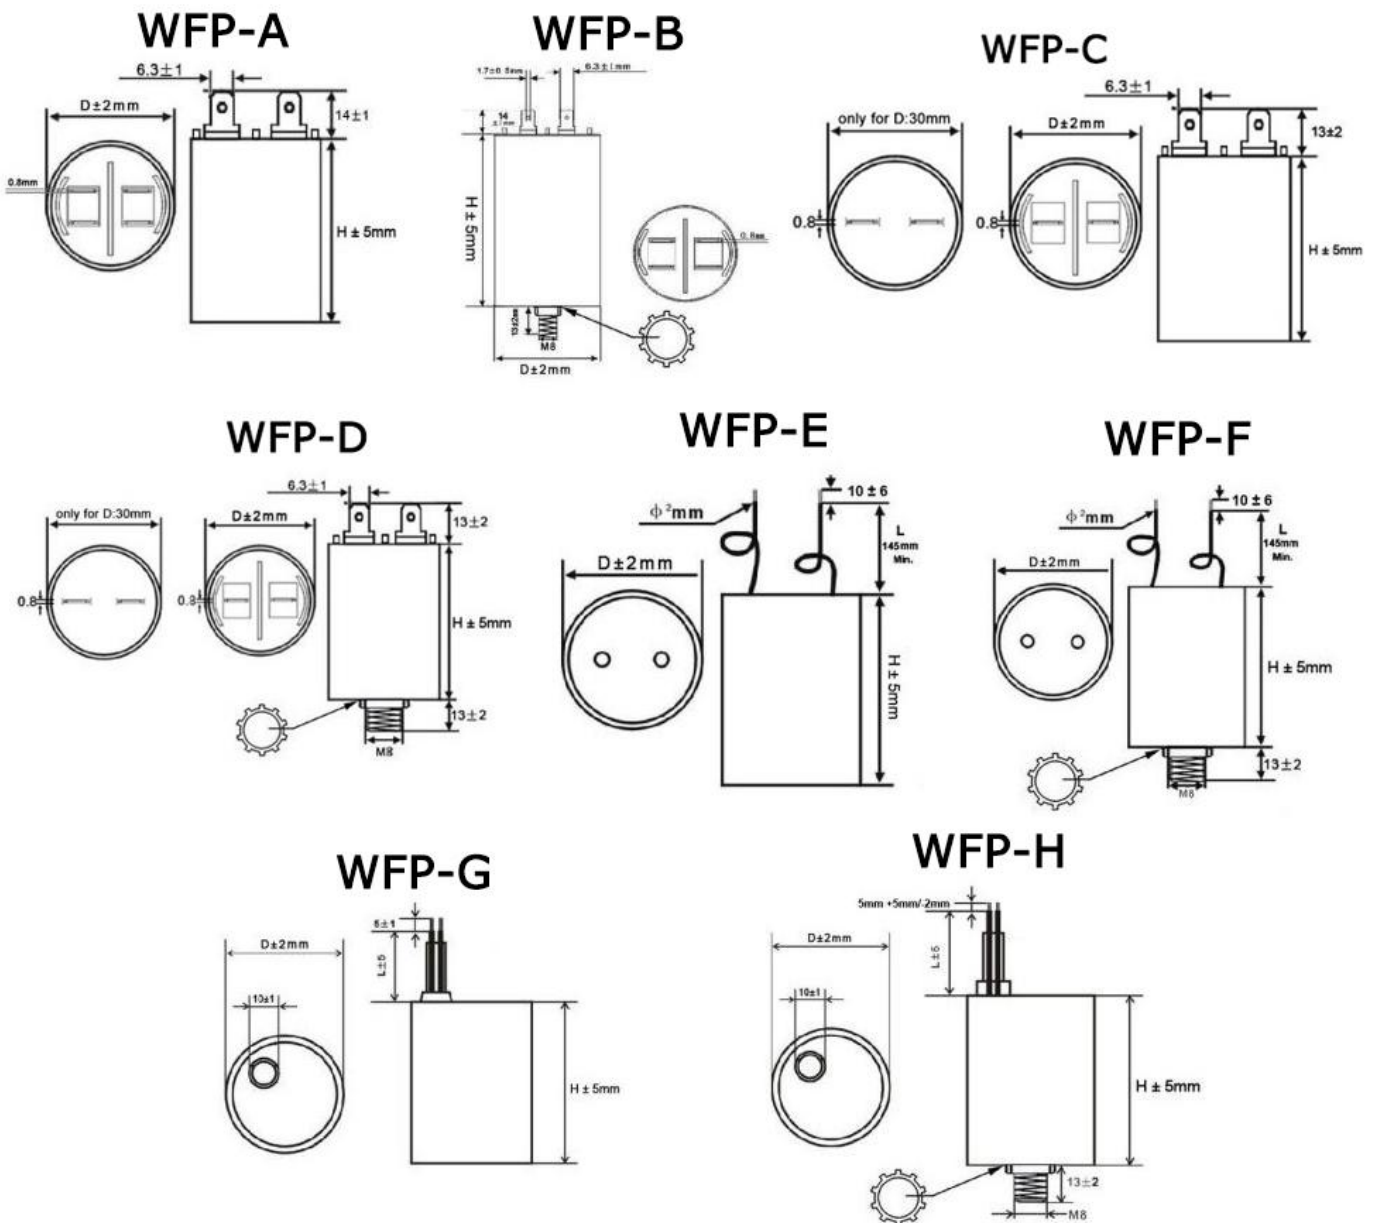

PICTURE



SPECIFICATIONS

Operating Temperature	-40°C ~ +85°C
Voltage Range	450VAC
Capacitance Range	1uF ~ 100uF
Capacitance Tolerance	±5%、 ±10%
Operating Frequency	50/60Hz
Withstand Voltage	T-T:2Un/2S; T-C:≥2200VAC/2S
Dissipation Factor	≤0.004 100Hz
Insulation Resistance	≥3000S

Note: Other Values are available on request. WEET is capable of doing custom service for you.



WFP-A		WFP-B		WFP-C		WFP-D		WFP-E		WFP-F		WFP-G		WFP-H	
450VAC		450VAC		450VAC		450VAC		450VAC		450VAC		450VAC		450VAC	
D	H	D	H	D	H	D	H	D	H	D	H	D	H	D	H
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	50	30	57	--	--	30	57	30	50	30	57	--	--	--	--
30	50	30	57	30	50	30	57	30	50	30	57	30	50	30	57
30	60	30	57	30	60	30	57	30	60	30	57	30	60	30	57
30	60	30	57	--	--	--	--	30	60	--	--	30	60	--	--
30	60	35	60	30	60	30	57	30	60	30	57	30	60	30	57
30	60	35	60	30	60	35	60	30	60	35	60	30	60	35	60
30	60	35	60	--	--	35	60	30	60	35	60	30	60	35	60
30	60	35	60	30	60	35	60	30	60	35	60	30	60	35	60
30	60	35	60	30	60	35	60	35	60	35	60	30	60	35	60
35	60	35	60	--	--	35	60	35	60	--	--	--	--	35	60
35	60	35	60	35	60	35	60	35	60	35	60	35	60	35	60
35	60	--	--	--	--	35	60	--	--	--	--	--	--	--	--
35	60	35	60	35	60	35	60	35	60	35	60	35	60	35	60
35	60	35	60	35	60	35	60	35	60	35	60	35	60	35	60
35	60	--	--	35	60	--	--	--	--	--	--	35	60	35	60
35	70	35	60	35	70	35	60	35	70	35	60	35	60	35	60
35	70	35	60	35	70	35	60	35	70	35	60	35	60	35	60
35	70	35	65	35	70	35	65	35	70	35	65	35	70	35	65
40	70	40	70	40	70	40	70	40	70	40	70	40	70	40	70
40	70	40	70	40	70	40	70	40	70	40	70	40	70	40	70
40	70	40	70	40	70	40	70	40	70	40	70	40	70	40	70
45	70	40	95	45	70	45	95	45	70	40	95	45	70	40	95
45	70	40	95	45	70	45	95	45	70	40	95	45	70	40	95
45	93	45	95	45	93	45	95	45	93	45	95	45	93	45	95
45	93	45	95	45	93	45	95	45	93	45	95	45	93	45	95
50	92	50	106	50	92	50	106	50	92	50	106	50	92	50	106
50	92	50	106	50	92	50	106	50	92	50	106	50	92	50	106
50	92	50	106	50	92	50	106	50	92	50	106	50	92	50	106
50	100	50	106	50	100	50	106	50	100	50	106	50	100	50	106
50	100	50	106	50	100	50	106	50	100	50	106	50	100	50	106
50	120	50	116	50	120	50	116	50	120	50	116	50	120	50	116
50	120	50	116	50	120	50	116	50	120	50	116	50	120	50	116
55	117	55	120	55	117	55	120	55	117	55	120	55	117	55	120
55	117	55	120	55	117	55	120	55	117	55	120	55	117	55	120
60	120	60	120	60	120	60	120	60	120	60	120	60	120	60	120
60	120	60	120	60	120	60	120	60	120	60	120	60	120	60	120
60	120	60	120	60	120	60	120	60	120	60	120	60	120	60	120



WEE Technology Company Limited
ROOM 1405, 14/F, LUCKY CENTRE,
171 WANCHAI ROAD,
WANCHAI, HONG KONG
www.weetcap.com
info@weetcap.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.



Copyright © 2000 WEE Technology, All rights reserved.