


**FEATURES**

- Wide temperature range, life time: 1000 Hours at 105°C
- Small size, miniaturized 7mm height, large capacity
- Used in automatic office machines, pocket calculators, car stereos and mini-audio sets, VCR, camera, CD-ROM, notebook etc.
- Variety of packing: Bulk, Ammo

**DRAWING and DIMENSIONS (mm)**

Unit(mm)

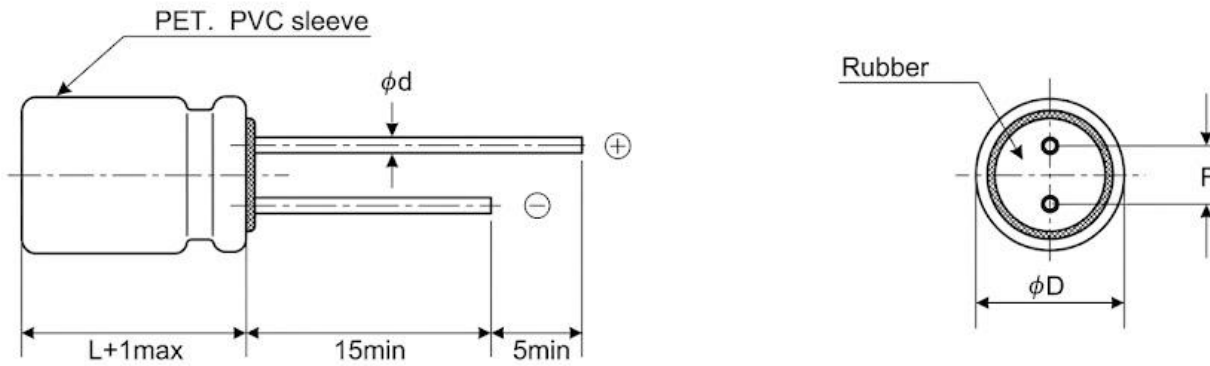

DØ(+0.5max)	4	5	6.3	8
F(±0.5)	1.5	2.0	2.5	3.5
d(±0.05)	0.45	0.50	0.50	0.50

**PICTURE**



**SPECIFICATIONS**

No	Item	Performance																											
1	Operating Temperature Range	-40 to +105°C																											
2	Rated Working Voltage Range	4V-63V.DC																											
3	Capacitance Tolerance	0.1-470μF																											
4	Capacitance Tolerance	±20%(at+20°C,120Hz)																											
5	Leakage Current	After 2 minutes application of rated voltage I≤0.01CV or 3 μA minimum at 20°C																											
6	Dissipation Factor(tanδ) ( 120Hz\+20°C )	<table border="1"> <thead> <tr> <th>Working Voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>tanδ max.</td> <td>0.35</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> </tr> </tbody> </table>	Working Voltage (V)	4	6.3	10	16	25	35	50	63	tanδ max.	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.09									
		Working Voltage (V)	4	6.3	10	16	25	35	50	63																			
tanδ max.	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.09																					
7	Characteristics at low temperature ( Impedance ratio at 120Hz )	<table border="1"> <thead> <tr> <th>Working Voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/+20°C</td> <td>6</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/+20°C</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Working Voltage (V)	4	6.3	10	16	25	35	50	63	Z-25°C/+20°C	6	4	3	2	2	2	2	2	Z-40°C/+20°C	12	8	6	4	4	3	3	3
		Working Voltage (V)	4	6.3	10	16	25	35	50	63																			
		Z-25°C/+20°C	6	4	3	2	2	2	2	2																			
Z-40°C/+20°C	12	8	6	4	4	3	3	3																					
8	High Temperature Loading	After 1000hrs. application of DC rated working voltage at +105°C, The capacitor shall meet the following limits: Post test requirements at + 20°C																											
		Leakage current	≤ the Initial specified value																										
		Capacitance change	≤±25% of initial measured value																										
		Dissipation Factor(tanδ)	≤200% of initial specified value																										
9	Shelf Life	After 1000hrs. Application of DC no rated working voltage at +105°C,The capacitor shall meet the following limits: Post test requirements at + 20°C																											
		Leakage current	≤200% of initial specified value																										
		Capacitance change	≤±20% of initial measured value																										
		Dissipation Factor(tanδ)	≤200% of initial specified value																										

**Temperature Coefficient**

Coefficient	Temperature(°C)	105	85	≤65
	Coefficient		1.0	1.7

**Multiplier for ripple current, Frequency Coefficient**

μF	Frequency	60 (50) Hz	120 Hz	400Hz	1K Hz	≥10K Hz
	0.1~47		0.80	1.00	1.30	1.45
68~470		0.80	1.00	1.15	1.25	1.35



**DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT**

W.V(SV) μF	4 (5)		6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)		50 (63)		63 (79)	
	0.1													4×7	1	4×7
0.22													4×7	2	4×7	2
0.33													4×7	3	4×7	3
0.47													4×7	5	4×7	5
0.68													4×7	7	4×7	7
1													4×7	10	4×7	10
2.2													4×7	16	4×7	16
3.3											4×7	18	4×7	19	5×7	24
4.7									4×7	20	4×7	22	5×7	24	6.3×7	30
6.8									4×7	24	5×7	27	6.3×7	30	6.3×7	35
10							4×7	25	4×7	28	5×7	32	6.3×7	38		
22			4×7	32	4×7	35	4×7	38	5×7	48	5×7 6.3×7	50 57	6.3×7 8×7	60 65		
33	4×7	25	4×7	40	4×7	43	5×7	55	6.3×7	63	6.3×7 8×7	54 68	6.3×7 8×7	60 78		
47	4×7	32	4×7	45	5×7	58	5×7 6.3×7	60 66	6.3×7	70	6.3×7 8×7	66 70				
68	4×7	44	5×7	65	6.3×7	70	6.3×7	70	6.3×7	75	8×7	78				
100	5×7	55	5×7	75	5×7 6.3×7	85 95	6.3×7 8×7	70 90	8×7	110						
150	5×7	70	6.3×7	85	6.3×7	95	6.3×7	102								
220	6.3×7	90	6.3×7	120	6.3×7 8×7	100 130										
330	8×7	150	8×7	160												
470	8×7	180														

Case Size: ØD×L (mm); Ripple Current (mAr.m.s) at 105°C 120KHz

**Note: Other capacitance is available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
FLAT/RM 705, 7/F,  
FA YUEN COMM BLDG NO.75,  
FA YUEN STREET, MONG KOK, KL, HK  
[www.weetcap.com](http://www.weetcap.com)  
[info@weetcap.com](mailto:info@weetcap.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.



**PN STRUCTURE:**

**100uF 25V ±20% 8x7mm P:3.5mm Bulk RoHS**

**PN: WGDSH71E101M00800070035000BR**

<b>WGD-SH7</b>	<b>1E</b>	<b>101</b>	<b>M</b>	<b>00800070</b>	<b>035</b>	<b>000</b>	<b>B</b>	<b>R</b>
Series	Rated Voltage	Capacitance	Capacitance Tolerance	Dimension	Pitch	Lead Length	Packing	Pb
	1.	2.	3.	4.	5.	6.	7.	8.

**1. Rated Voltage**

Code	0J	1A	1C	1D	1E	1V	1G	1H	1J	1K	2A	2B
Voltage	6.3V	10V	16V	20V	25V	35V	40V	50V	63V	80V	100V	120V
Code	2C	2K	2D	2E	2F	2U	2V	2G	2X	2W	2H	2Y
Voltage	160V	180V	200V	250V	315V	330V	350V	400V	420V	450V	500V	550V

**2. Capacitance**

Code	0R1	R22	R33	R47	010	2R2	3R3	4R7	100	220	330	470	101
Capacitance (μF)	0.1	0.22	0.33	0.47	1	2.2	3.3	4.7	10	22	33	47	100

**3. Capacitance Tolerance**

Code	K	L	M
Tolerance	±10%	±15%	±20%

**4. Dimension**

Code	00500110	00630120	01300200	03500450
Dimension (mm)	5x11	6.3x112	13x20	35x45

**5. Pitch**

Code	020	075	100	127
Pitch (mm)	2.0	7.5	10	12.7

**6. Lead Length**

Code	000	040	045	050
Lead Length	Standard	4.0	4.5	5.0

**7. Packing**

Code	B	A
Packing	Bulk	Ammo

**8. Pb**

Code	L	R
Pb	Leaded	RoHS

