



**FEATURES**

- WMB is constructed with metallized polyester film as medium and electricode, wrapped and sealed with flame-retardant plastic and epoxy resin. With high reliability, high temperature-resistance, small volume, large capacity and good self-healing property.
- Mainly used in instruments and the DC & AC circuit of the household equipment and the fractional frequency circuit of acoustics system.

**DRAWING (mm)**

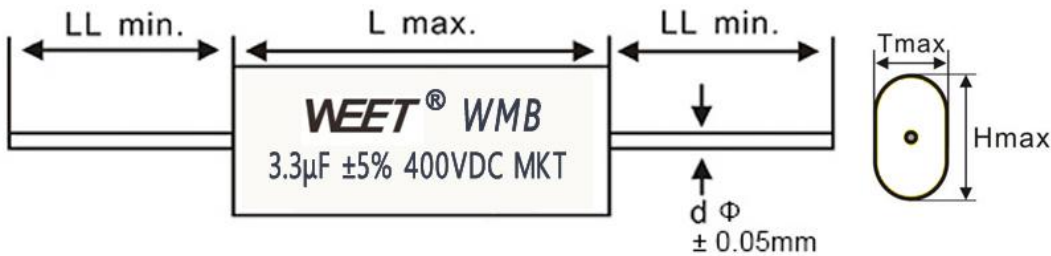

**PICTURE**

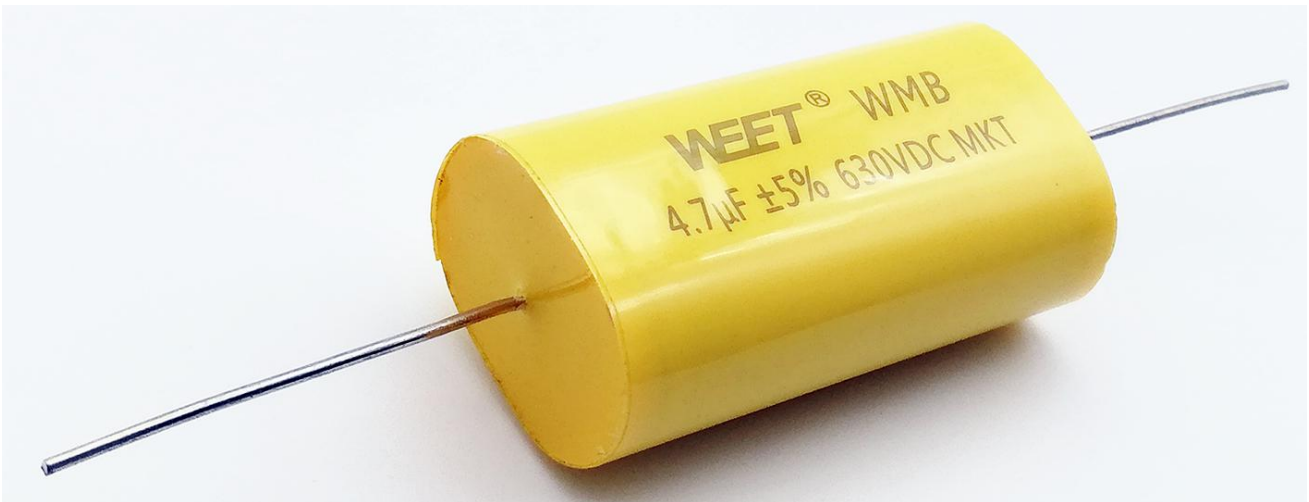

**SPECIFICATIONS**

Operating Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Rated Voltage : 100V, 250V, 400V, 630V.DC  
 Withstand Voltage : 1.6UR 2s (1.5UR 5s)  
 Capacitance Range : 0.01 ~ 68 $\mu\text{F}$   
 Capacitance Tolerance :  $\pm 5\%$ ,  $\pm 10\%$   
 Insulation Resistance :  $C \leq 0.33\mu\text{F}$   $VR \leq 100\text{V}(10\text{V}) \geq 7500\text{M}\Omega$   
 $VR > 100\text{V} \geq 15000 \text{ M}\Omega$   
 $C > 0.33\mu\text{F}$   $VR \leq 100\text{V}(10\text{V}) \geq 2500\text{S}$   
 $VR > 100\text{V} \geq 5000\text{S}$

Dissipation Factor	$C < 1\mu\text{F}$	$\leq 0.013$ 10KHz
	$1\mu\text{F} < C \leq 10\mu\text{F}$	$\leq 0.008$ 1KHz
	$C > 10\mu\text{F}$	$\leq 0.010$ 1KHz

## SIZE TABLE (mm)

VDC		100VDC				250VDC				400VDC				630VDC			
Mfd		L	T	H	d	L	T	H	d	L	T	H	d	L	T	H	d
<b>103</b>	<b>0.01</b>	15.0	5.0	8.0	0.6	15.0	5.0	8.0	0.6	15.0	5.0	8.0	0.6	15.0	5.0	8.0	0.6
<b>223</b>	<b>0.022</b>	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6
<b>333</b>	<b>0.033</b>	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	20.0	5.0	9.0	0.6
<b>473</b>	<b>0.047</b>	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	20.0	5.0	9.0	0.6
<b>683</b>	<b>0.068</b>	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	20.0	5.0	8.5	0.6	20.0	6.0	11.0	0.6
<b>104</b>	<b>0.1</b>	15.0	5.0	8.5	0.6	15.0	5.0	8.5	0.6	20.0	5.0	8.5	0.6	15.5	7.0	10.5	0.6
<b>224</b>	<b>0.22</b>	15.0	5.0	8.5	0.6	20.0	5.0	9.0	0.6	15.5	7.5	11.5	0.6	20.5	7.5	11.5	0.6
<b>334</b>	<b>0.33</b>	15.0	5.0	9.0	0.6	15.5	7.0	11.0	0.6	20.5	6.5	11.5	0.6	20.5	8.0	14.5	0.6
<b>474</b>	<b>0.47</b>	15.5	6.0	10.0	0.6	15.5	8.5	13.0	0.8	26.0	6.5	11.0	0.6	26.0	7.5	15.5	0.6
<b>684</b>	<b>0.68</b>	20.0	5.0	9.0	0.6	20.5	7.5	12.0	0.6	26.0	7.5	12.5	0.6	32.0	8.0	16.0	0.6
<b>105</b>	<b>1.0</b>	20.0	7.0	11.0	0.6	25.0	7.0	12.0	0.6	32.0	7.5	14.0	0.6	32.0	9.5	18.5	0.8
<b>225</b>	<b>2.2</b>	25.0	8.0	12.0	0.6	26.0	11.5	15.5	0.8	37.5	10.5	17.0	0.8	37.5	13.5	21.5	1.0
<b>335</b>	<b>3.3</b>	25.0	9.5	16.0	0.8	26.0	14.0	18.5	0.8	37.5	13.0	20.5	1.0	47.5	17.0	26.5	1.0
<b>405</b>	<b>4.0</b>	31.0	8.0	15.0	0.6	32.0	13.5	18.0	0.8	37.5	14.0	22.0	1.0	47.5	15.5	23.5	1.0
<b>475</b>	<b>4.7</b>	31.0	9.0	15.5	0.8	32.0	13.5	19.5	0.8	37.5	15.0	24.5	1.0	47.5	17.5	25.0	1.0
<b>565</b>	<b>5.6</b>	31.0	10.0	17.0	0.8	32.0	15.0	21.0	1.0	47.5	13.5	23.0	1.0	57.5	16.5	24.5	1.0
<b>685</b>	<b>6.8</b>	31.0	11.0	18.5	0.8	37.5	14.0	22.0	1.0	57.5	13.0	22.5	1.0	57.5	18.5	26.5	1.0
<b>825</b>	<b>8.2</b>	31.0	12.5	19.0	0.8	37.5	15.5	23.5	1.0	57.5	14.5	24.0	1.0	57.5	20.5	28.5	1.0
<b>106</b>	<b>10.0</b>	31.0	14.5	21.0	1.0	37.5	16.5	26.5	1.0	57.5	16.0	27.0	1.0	57.5	23.0	30.5	1.0
<b>156</b>	<b>15.0</b>	46.0	15.0	22.0	1.0	47.5	17.5	27.0	1.0	57.5	20.0	31.0	1.0	57.5	27.0	37.0	1.0
<b>226</b>	<b>22.0</b>	46.0	17.5	25.0	1.0	47.5	22.0	33.0	1.0	67.5	22.0	33.0	1.0	--	--	--	--
<b>336</b>	<b>33.0</b>	56.0	19.0	27.0	1.0	57.5	23.5	34.5	1.0	--	--	--	--	--	--	--	--
<b>476</b>	<b>47.0</b>	56.0	24.5	31.0	1.0	56.0	32.0	39.0	1.0	--	--	--	--	--	--	--	--
<b>686</b>	<b>68.0</b>	56.0	29.0	35.0	1.0	61.0	37.5	45.0	1.0	--	--	--	--	--	--	--	--

**Note: Other Values are available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
ROOM 1405, 14/F, LUCKY CENTRE,  
171 WANCHAI ROAD,  
WANCHAI, HONG KONG  
[www.musicaps.com](http://www.musicaps.com)  
[sales@musicaps.com](mailto:sales@musicaps.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

