
WEET®
We Enhance Efficiency

WMG Series

Superior Film and Foil Audio Capacitors

- Top of the range pure aluminum foil capacitor,
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance
- A luxury capacitor designed especially for modern high-end tweeters and mid-range drivers

DRAWING (mm)

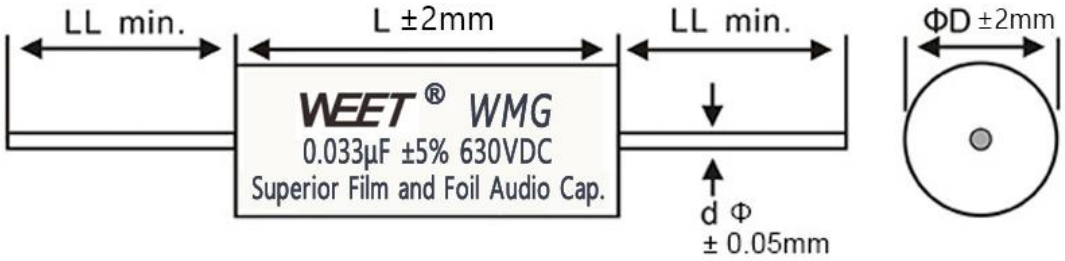

PICTURE




SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55℃ ~ +85℃
Capacitance range	0.01~1.0uF
Capacitance tolerance	±5%（J） 1KHz
Rated voltage	630V DC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0002 1KHz
Insulate the electric resistance	CR≤0.33μF, I.R≥15,000MΩ CR>0.33μF, I.R≥5,000S
Leads Diameter	0.8mm Tinned Copper Wire

SIZE TABLE (mm)

μF	630V				
	Dissipation	OD	L	d	LL
0.022μF	≤0.0002	8	24	0.8	38
0.033μF	≤0.0002	9.5	24	0.8	38
0.047μF	≤0.0002	12	24	0.8	38
0.068μF	≤0.0002	10	30.5	0.8	38
0.1μF	≤0.0002	12	30.5	0.8	38
0.22μF	≤0.0002	16.5	30.5	0.8	38
0.33μF	≤0.0002	20	30.5	0.8	38
0.47μF	≤0.0002	19.5	35	0.8	38
0.68μF	≤0.0002	15.5	45	0.8	38
0.82μF	≤0.0002	17	45	0.8	38
1μF	≤0.0002	18.5	45	0.8	38

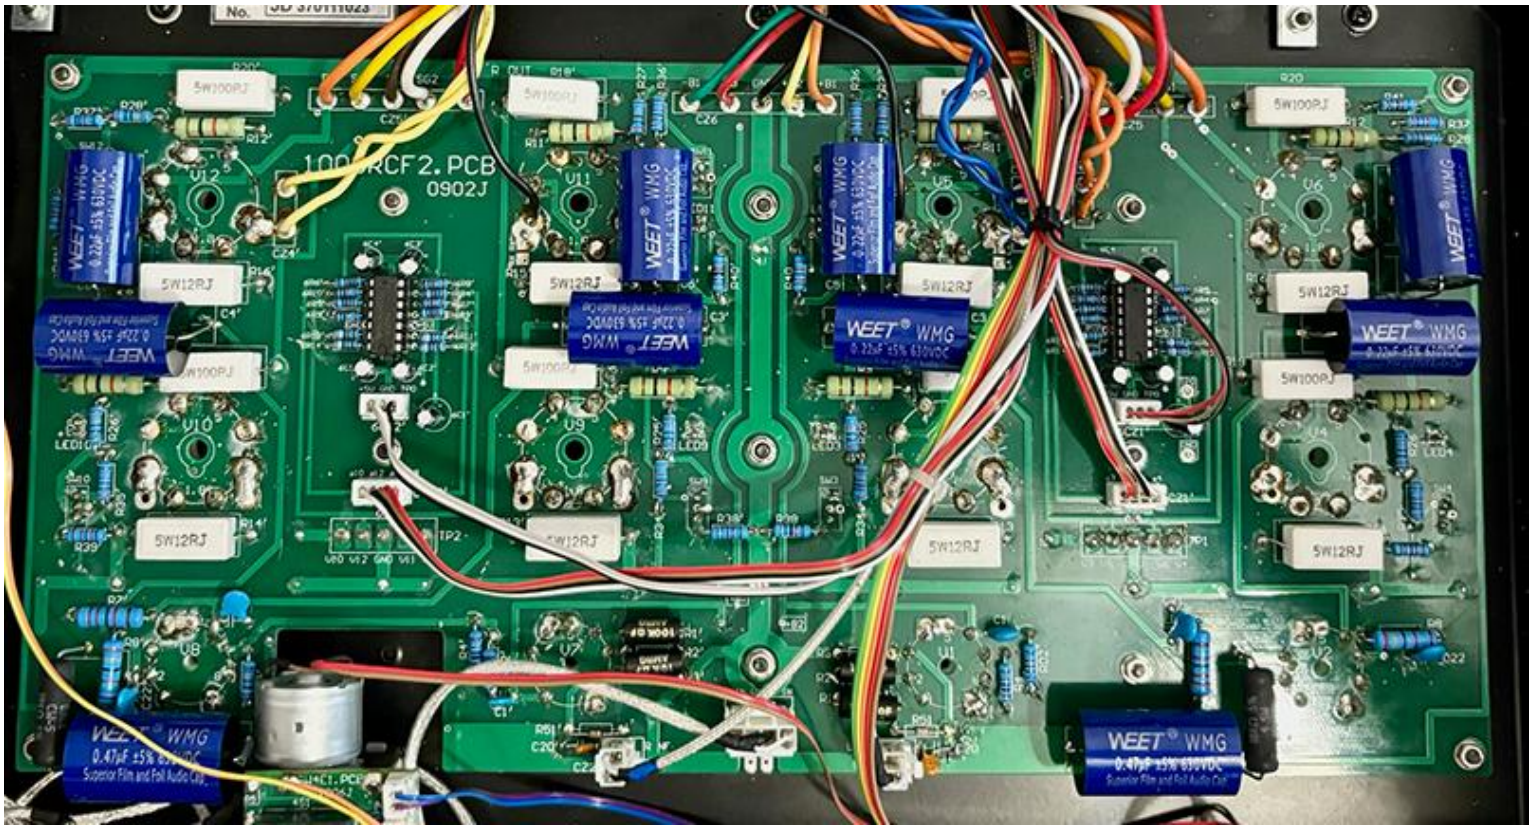

Note: Other Values are available on request. WEET is capable of doing custom service for you.

WEE Technology Company Limited
ROOM 1405, 14/F, LUCKY CENTRE,
171 WANCHAI ROAD,
WANCHAI, HONG KONG
www.musicaps.com
sales@musicaps.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.